



**Tt**<sup>®</sup> **eSPORTS**  
By Thermaltake

**POSEIDON Z** **FORGED**  
GUI SOFTWARE GUIDE

# **A** CONTENTS

---

<b>PAGE</b>	<b>01</b>	<b>Main Interface</b>		
		● Main	-----	<b>01</b>
		● Profiles	-----	<b>02</b>
		● Normal Mode / Game Mode	-----	<b>03</b>
		● Key Assignment	-----	<b>04</b>
<b>PAGE</b>	<b>09</b>	<b>Macro Setting</b>		
		● Macro Setting Interface	-----	<b>09</b>
		● Macro Manager	-----	<b>10</b>
		● Macro Record Setting	-----	<b>11</b>
		● Macro Record Timeline	-----	<b>12</b>
		● Insert Command	-----	<b>14</b>
<b>PAGE</b>	<b>15</b>	<b>I.S.S (Instant Shift System)</b>		
		● I.S.S Button and Setting	-----	<b>15</b>
<b>PAGE</b>	<b>20</b>	<b>Light Setting</b>		
		● Light Option Interface	-----	<b>17</b>
<b>PAGE</b>	<b>21</b>	<b>Firmware Update</b>		
		● How to Update Firmware	-----	<b>18</b>

# | CONTENT ONE Main Interface



## Reset / Register / Guide / Close

**Reset** : Reset all setting

**Register** : Register as Tt eSPORTS's follower and receive updates from Tt eSPORTS via E-mail.

**Guide** : Configuration software manual

**Close** : Close Tt eSPORTS POSEIDON Z Forged GUI Software

Page : 03

## Switch Normal/Game Mode

The Macro frame indicates the Mode (Normal/Game) you have selected

## Key Assignment

Assign function to each key [Page : 04](#)

## Apply / Cancel / OK

**Apply**: Click Apply after completing profile setting and for importing setting

**Cancel**: Click Cancel if you wish to cancel the setting

**OK**: Click OK after setting has been completed



Page : 02

## Profile

POSEIDON Z Forged has 5 profiles setting .

## Macro Manager / Light

Macro Manager [Page : 09](#)

Light Option : [Page : 17](#)

Change POSEIDON Z Forged light

Page : 15

## INSTANT SHIFT SYSTEM

I.S.S allows users to use either the Shift, Ctrl, or Alt key to quickly switch between macro groups



## Tt eSPORTS GUI of Profile

Tt eSPORTS' offers users to set profiles for different purposes and offers gamers to customize their own macros, making it one-of-a-kind!



### Switch to Profile

Choose the Profile you wanted to switch to



## More Macro Key into Game

Tt eSPORTS develops a powerful macro setting. Just switch the mode to either normal or game mode and you can experience a powerful and useful function!

You can program more macro keys when you switch to Game Mode! This make POSEIDON Z Forged a gaming weapon that will enhance your gaming experience!



### Normal Mode

#### In Normal Mode

- Scroll Wheel lights up
- Tt Dragon light with Pulse-break lighting effect
- Two lights can turn on or off independently
- Bottom Panels lights up

### Game Mode

#### In Game Mode, Left Windows key will be locked.

- You can set all the keys to macro keys besides the Windows Key.
- In Normal Mode you only can set Additional T1 to T10 key(On both side) become a macro key.

### Normal and Game Mode Comparison

Mode \ Key Assignment	T Key	Single Key	Launch Prgm
Normal Mode	10 (Only T1 to T10 key)	10 (Only T1 to T10 key)	10 (Only T1 to T10 key)
Game Mode	20(All keys besides two Win key)	112(All keys besides two Win key)	112(All keys besides two Win key)

\*T1 to T10 key is additional side keys on POSEIDON Z Forged both.

\*T Key is an assignment command which can be set to a key to become a macro key. (More information about T Key please go to Page 6)

## Customization for each of POSEIDON Z Forged's Key

Each POSEIDON Z Forged's button can be customized as your preferred key in Game mode, even A to Z or F1 to F12 can be changed!

Customize it and make the POSEIDON Z Forged your very own ultimate weapon to conquer!

**POSEIDON Z Forged Can Do More than You Expect!**

### Key Configuration

Click on each key to change its function (See right picture)

Click each key to assign functions. Once the key which had been chosen or been set it will become Red

### Key Assignment

Choose the key to manage function



## 4 Key Functions to be Assigned!

Keys can be assigned for four functions ( Macro(T Key) / Single Key / Default / Launch Program ).




- Default :** All keys function will be set as default setting.
- Macro(T Key) :** Assign macro that has been recorded from Macro Manager.
- Single Key :** Set any key to become a key signal ( i.g. : “A” key as the “B” signal)
- Launch Program :** Launch the pre-set program directly



### Macro (T Key)

T Key is the Macro key that you programmed.

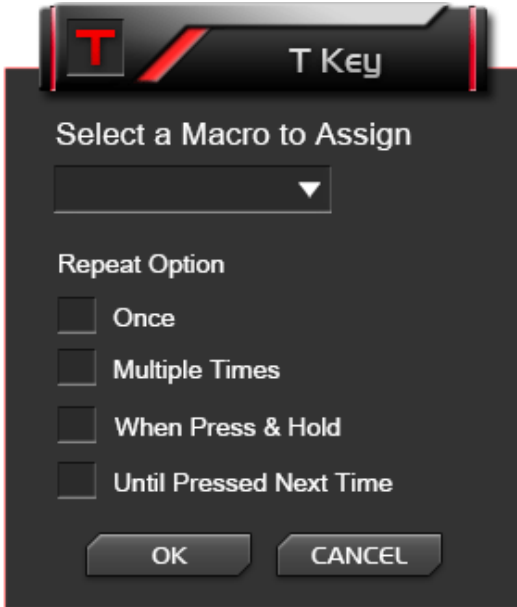


### Assign macro

Select a programmed macro that already recorded from Macro Manager ([Macro record detail, see Page 17](#))

### Repeat


Customize the times that you want to have the macro repeats..

- Once :** Macro will repeat once.
- Multiple Times :** Macro will repeat depends on the repeat count set.
- When press & hold :** Macro will keep repeating while pressing and holding.
- Until press next time :** Macro will start repeating when you click and stop unless you click again

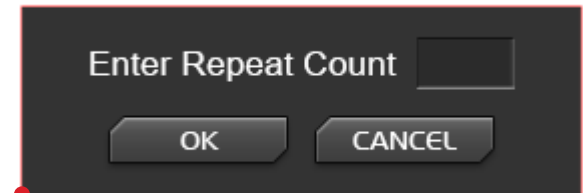

## Single Key

Change a Key to become other keys signal.  
I.G. Choose "A" key and change it become "B" key.

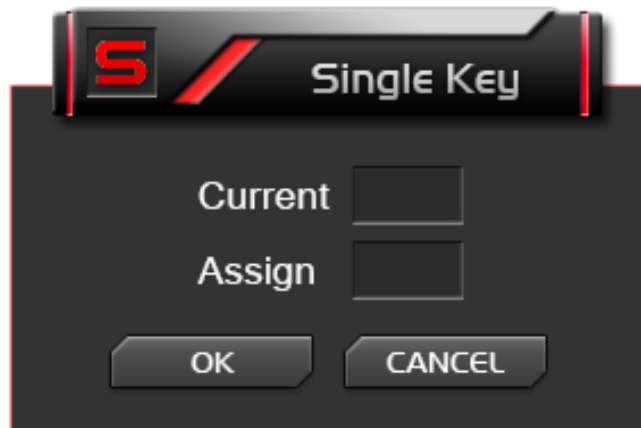

## Default

POSEIDON Z Forged has its own pre-configured functions, which is the default. If you wanted to change back to the default setting, you can just choose Default and it will be changed back to the pre-configured functions.



## Launch Program


Pre-set a program and the program will showed up whenever you click on the keys that has been programmed.



## Launch Program button

Click the Launch Program button and system will pop out the file manager for you to choose the program that you want to launch.

# | CONTENT TWO Macro Setting

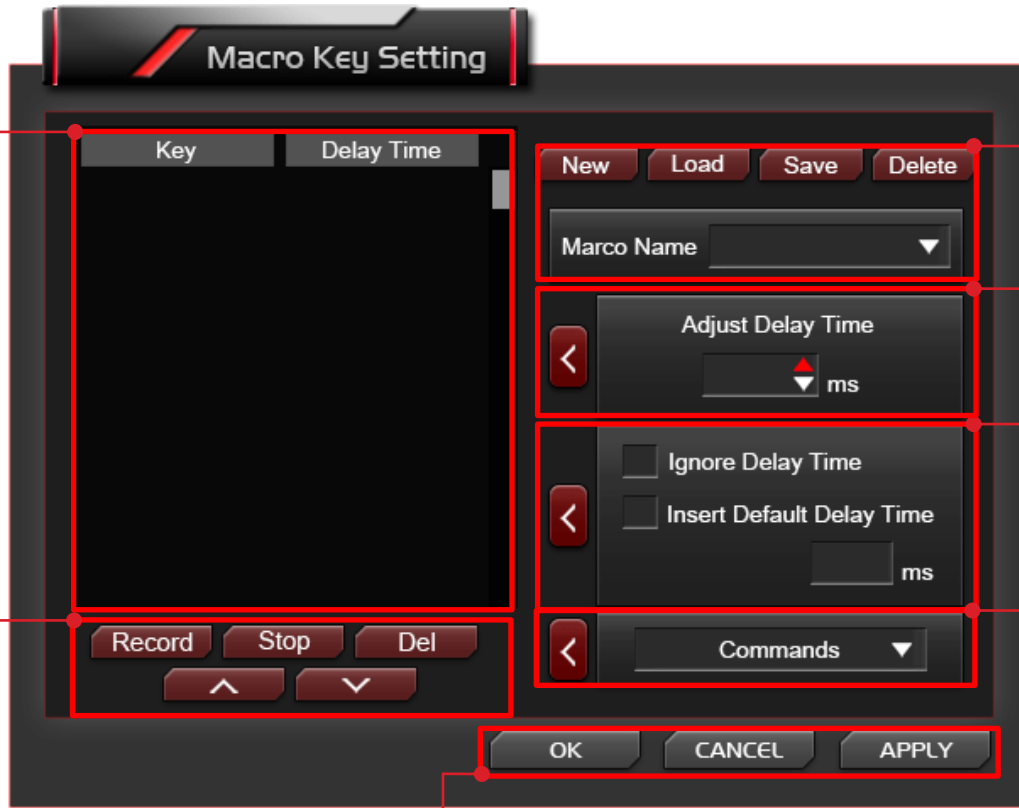

Page : 12

## Record Macro Timeline

To check the programmed macros.

Page : 10

## Macro Manager

Create / Load / Save / Delete Macro and Modifying Macro Name.

Page : 11

## Adjust Delay Time

Customize the delay time

Page : 11

## Macro Record Setting

2 selections for delay time

Page : 12

## Macro Modification

Modified recorded macros

Page : 14

## Commands

Set commands to macro

## Apply / Cancel / OK

**APPLY:** Click Apply when Macro Setting completed

**CANCEL:** Click Cancel to cancel the setting

**OK:** Click OK after Macro Setting has been fully completed

## Macro Manager

Macro manager allows you to create, delete, save and load a macro.



### Manage Macro

#### **NEW / DELETE / SAVE / LOAD macro**

NEW - Create a new Macro

DELETE - Delete existing Macro

SAVE - Save a Macro .

LOAD - Load a Macro that had been saved.


#### **Macro Name**

Select a Macro.




## Macro Record Setting

3 selections provided for you to choose for setting the Delay Time.

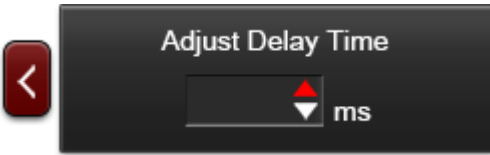


### Adjust Delay Time

You can adjust Delay Time that already record.  
If want to Adjust Delay Time, select the particular Delay Time and start adjusting.  
\*Interval for Each of Delay Time is 50ms

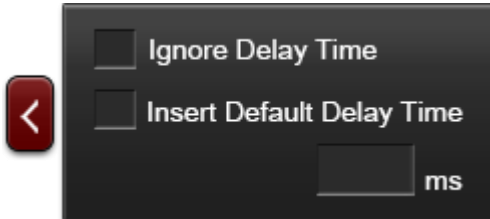

### Macro Delay Time Setting


**Ignore Delay Time** : No delay time between key signal.  
**Insert Default Delay Time** \_\_\_ ms : Delay time depend on the preferred time set.  
\*Before you record Macro, you should set to ignore or insert default Delay Time.  
\*Insert Default Time interval has to be 50ms

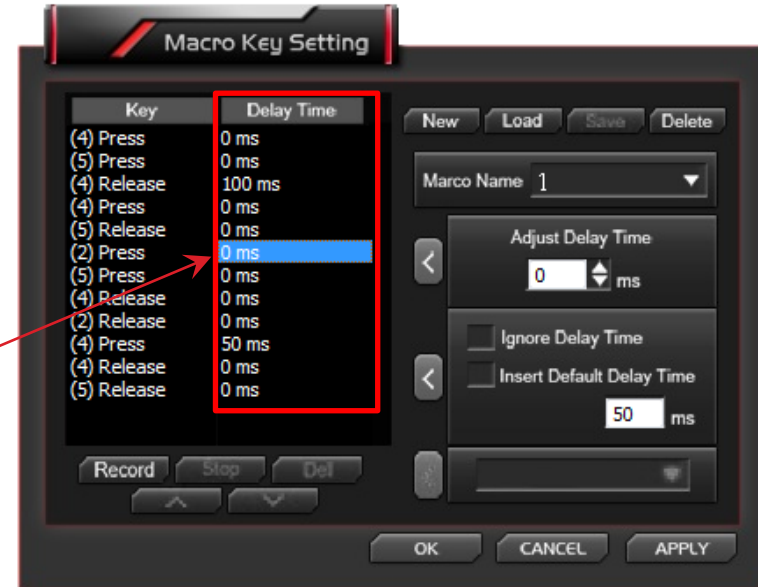



## Macro Record Timeline

Allow you to program your macro as preferred.

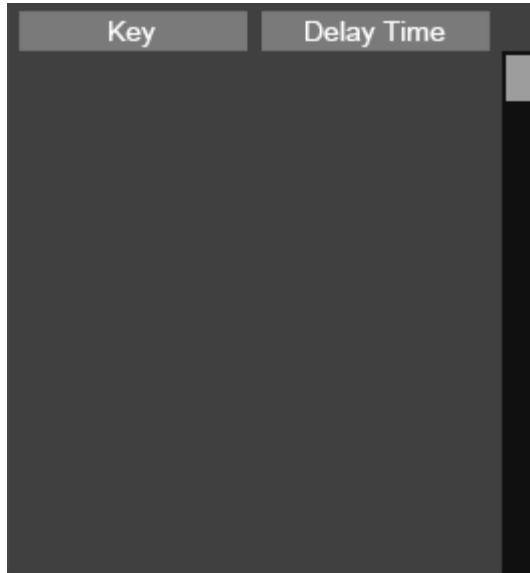

RECORD

**Record program** : Click Record to start recording via your keyboard or mouse and all signal will be recorded on this timeline.

DELETE

**Delete signal** : Choose the recorded signal that you wish to delete (Once signal has been chosen, the background will turn RED as below picture)



Click Delete and the selected signal will be removed.

STOP

**Stop program** : Click Stop whenever recording has been completed.





## Macro Record Timeline

Once Macro Name and Recording have been completed, you can proceed to programming your macro now.



### Switch signal up or down

Select the signal and click Up/ Down to rearrange the recorded signals

**Note : Please be careful while arranging the “Press” & “Release” signal**

Key	Delay Time
'1'	2ms
'1'	0ms
'2'	4ms
'2'	0ms
'3'	0ms
'3'	0ms

Choose “3” and press “UP” or “DOWN” to arrange →


Key	Delay Time
'1'	2ms
'1'	0ms
'3'	0ms
'3'	0ms
'2'	4ms
'2'	0ms

## Insert Command



If you want to modify or insert Command to the programmed macro, please click the Command button and select a command into macro from the drop down selection.

### Insert Command

Choose the key that you want to insert the Commands to



Select a command as below picture

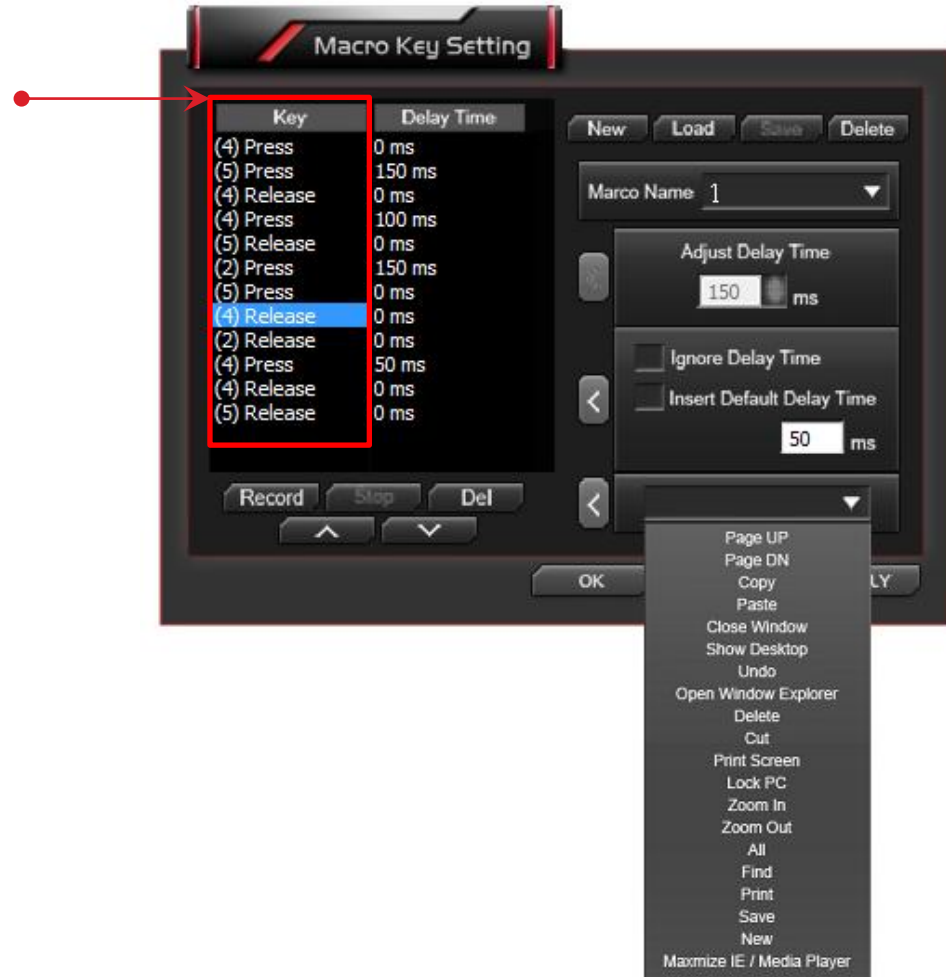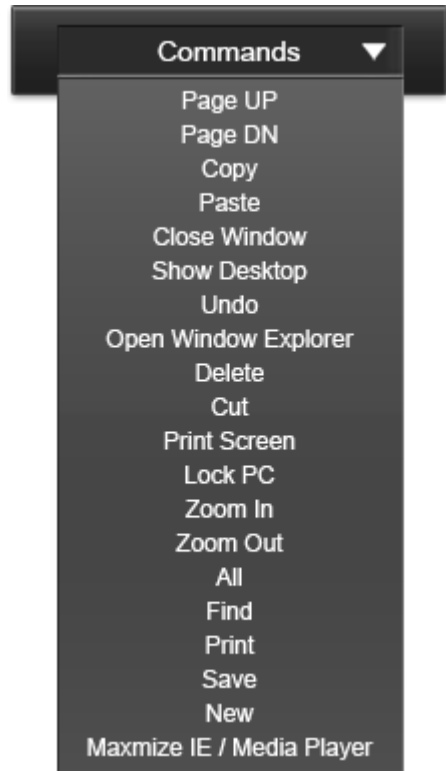

Key	Delay Time
(4) Press	0 ms
(5) Press	150 ms
(4) Release	0 ms
(4) Press	100 ms
(5) Release	0 ms
(2) Press	150 ms
(5) Press	0 ms
(4) Release	0 ms
(2) Release	0 ms
(4) Press	50 ms
(4) Release	0 ms
(5) Release	0 ms



# | CONTENT THREE Instant Shift System




## POWERFUL I.S.S function create by Tt eSPORTS

Instant-Switch-System (I.S.S.) allows for instant access to all stored macros, without changing profiles .



### Click I.S.S Boost button at GUI Main Page to shift profiles

Click I.S.S allows users to use either the Shift, Ctrl, or Alt key to quickly switch between macro groups



# | CONTENT FOUR *Light Setting*



## Light Zone

POSEIDON Z Forged have 5 light zones for selection:

**ZONE I: Full keyboard.**

**ZONE II: 80% factory form light.**

**ZONE III: FPS light. (1 to 6 and WASD )**

**ZONE IV: MOBA light. (1 to 6 and QWERDF )**

**ZONE V: MMORPG light. (1 to + and WASD )**

## Brightness Level

6 Levels include OFF & additional Pulse effect

## OK / CANCEL/ APPLY

**OK:** Click OK to save the setting

**CANCEL:** Click CANCEL to cancel the setting

**APPLY:** Click APPLY to save the setting

# | CONTENT FIVE Firmware Update





## Update Your POSEIDON Z Forged Firmware

Please follow our official Website on : [www.ttesports.com](http://www.ttesports.com)

Go to the Product web page, scroll down to the “Download” section for firmware updates information.